

Technical Data Sheet

SCES-DS1



Wall Mount Emergency Deluge Shower

DELUGE SHOWER	EYEWASH	EYE / FACE WASH	HAND OPERATED	FOOT OPERATED	DRAIN BOWL
✓			✓		

APPLICATION

The Spill Crew SCES-DSW emergency safety shower provides a deluge of water to rapidly flush contaminants from the body. These wall mounted, pull rod activated showers with single point water supply connection are fully compliant with Australian Standard AS4775-2007, Emergency showers and eyewash equipment.



FEATURES

- Manufactured from corrosion resistant materials.
- Pull rod operated shower activation valve.
- Integral baseplate to allow easy floor fixing.
- Suitable for wall mounting

SPECIFICATIONS

SERVICES

Supply inlet:	25mm BSP female
Design pressure - min/max:	210 kPa / 550 kPa
Shower flow rate - min/design:	75.7 L/min / 76 L/min
Max temperature:	38°C

COMPONENTS


Pipework:	Grade 316 stainless steel
Activation valve:	25mm, full bore, CF8M, 1000 WOG
Shower head:	Grade 316 stainless steel
Activation pull rod:	Grade 316 stainless steel

SHIPPING

Shipping weight:	5kg
Shipping dimensions:	55cm x 40cm x 30cm

PERFORMANCE & COMPLIANCE

Testing:	Spill Crew emergency showers and eyewash equipment are manufactured to meet the requirements of AS4775-2007 and are independently tested for compliance by a NATA accredited laboratory.
Compliance:	For compliance with AS4775-2007, the bottom of the shower head should be not less than 2083mm nor more than 2438mm in height from the surface on which the user stands.
Temperature:	AS4775-2007 refers to flushing fluids in excess of 38°C being harmful to the eyes and can enhance chemical interactions with the skin.
Research & Development:	Due to continual improvement and ongoing research and development, specifications may change without notice.

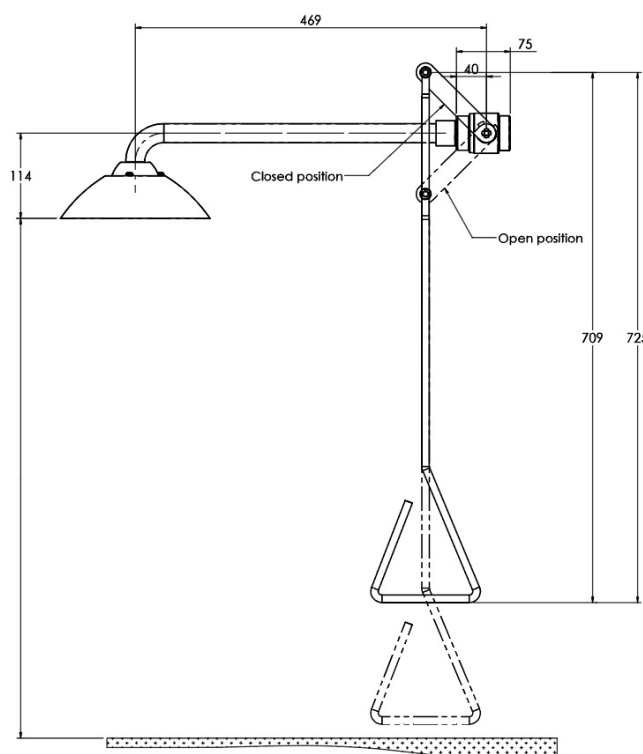

Top View:

