


OPTIWASH[®] GRAVITY FED EYEWASH - 38 L

In locations with limited access to plumbed water, this wall-mounted eyewash unit offers the solution to keep your workforce safe. This portable, slimline 38-litre tank delivers a controlled flow of 1.5 litres per minute of water for 15 minutes, to efficiently flush the eyes when exposed to harmful contaminants.

Features

- Manufactured to meet Australian Standard AS4775-2007
- Delivery manifold drains unused water away reducing the risk of stagnating water becoming trapped
- High visibility orange unit incorporates handles to make moving and relocating easy
- Unit utilises gravity to deliver a controlled flow of a minimum of 1.5 litres per minute of water for 15 minutes
- Wall mounting bracket included
- Optional eyewash preservative helps prevent the growth of bacteria in the eyewash tank (sold separately in a pack of 4x 250ml bottles).

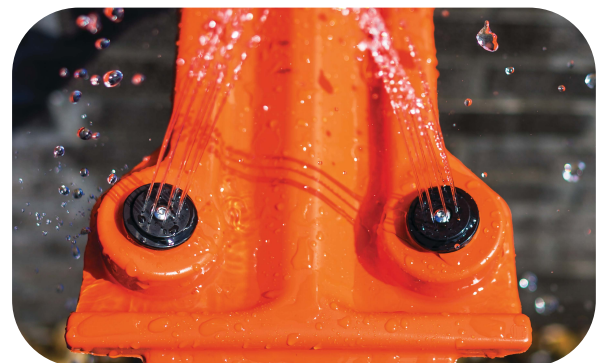

Code	Item description	Material	Flow Rate	Dimensions (HxWxD) mm
SCES-EG38	OptiWash [™] Gravity Fed Eyewash - 38 Litre	HDPE	1.5 (L/per min)	774 x 450 x 186
SCSS-EEP4	Eyewash Bacteriostatic Preservative, pack of 4x 250mL bottles	-	-	-